

SUBMITTAL DATA – VRF Outdoor Unit MDVC-V110W/DVN1

| Mini | VRF | Cooling | Only |
|------|-----|---------|------|

| Job: | Engineer: |
|---------------------|---|
| Location: | Architect: |
| Schedule No.: | Date: |
| System Designation: | For: □Reference □Approval □Review □Construction |

FEATURES

- All DC Inverter Technology
- Auto Addressing
- Anti-corrosion Protection (Optional)
- Wide Application Range
- Single Fan

- Easy Installation and Service
- Cooling Only

| SPECIFICATIONS | | |
|---------------------------------------|------------------------|------------------|
| PERFORMANCE | | |
| Cooling Capacity | Btu/h | 37,500 |
| | kW | 11.0 |
| Power Input | kW | 2.75 |
| EER | W/W | 4.00 |
| | Btu/W*h | 13.6 |
| ELECTRICAL DATA | | |
| Power Supply | V/Hz/Ph | 220V,1Ph,50/60Hz |
| Min. Circuit Ampacity | Α | 23 |
| Total Overcurrent Circuit Protection. | Α | 25 |
| Max. Fuse Amps. | А | 30 |
| Compressor RLA | Α | 9.7 |
| No. of Compressors | / | 1 |
| Outdoor Fan Power Input | W | 90 |
| Outdoor Fan FLA | Α | 1.0 |
| GENERAL DATA | | |
| Connection Ratio | % | 45% to 130% |
| Max. # of Indoor Units | / | 6 |
| Sound Pressure Level | dB(A) | 54 |
| Outdoor Fan Air Volume | m ³ /h(CFM) | 3,400(2000) |
| Refrigerant type | / | R410A |
| Factory refrigerant charge | kg(lbs.) | 1.4(3.1) |
| DIMENSIONS | | |
| | Height | 862(33-15/16) |
| Unit Dimensions mm(in.) | Width | 973(38-5/16) |
| | Depth | 302(11-7/8) |
| Liquid Pipe Connection | mm(in.). | Ф9.52 (Ф3/8) |
| Gas Pipe Connection | mm(in.). | Ф15.9 (Ф5/8) |
| Net Weight | kg(lbs.) | 58 (128) |
| Shipping Weight | kg(lbs.). | 63 (139) |



OPTIONAL ACCESSORIES

1. Cooling Capacity data is rated at the following conditions:

80.6°FDB / 66.2°FWB Indoor, 95°FDB Outdoor;


2. Sound pressure level is measured at a position 1m (3.28ft.) in front of the unit and 1.3m (4.26ft.) above the floor in a semi-anechoic chamber




SUBMITTAL DATA – VRF Outdoor Unit MDVC-V110W/DVN1

Mini VRF Cooling Only

DIMENSIONAL DRAWINGS (mm)

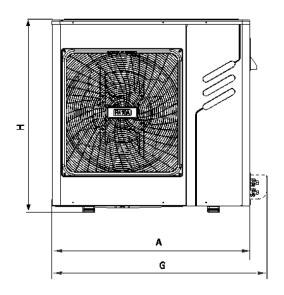

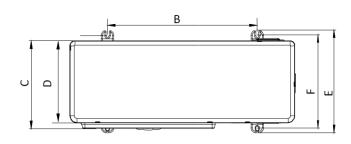

| Model | А | В | С | D | Е | F | G | Н |
|--------------|-----|-----|-----|-----|-----|-----|-----|-----|
| 7.2/9.2/11.0 | 895 | 590 | 346 | 302 | 355 | 333 | 973 | 862 |

INSTALLATION SPACE REQUIREMENT (mm)

