

FUJITSU

Calidad y Durabilidad

Halcyon 

WALL MOUNTED HIGH-SEER 9, 12 and 15,000 BTU Systems

Systems 9LZAS1, 12LZAS1, 15LZAS1



- ✓ Built-In Wi-Fi
- ✓ Up to 33.1 SEER
- ✓ 4-Way Auto Louver



MOST EFFICIENT

All systems feature high efficiencies and are ENERGY STAR® Most Efficient 2020 Qualified, meaning lower utility bills for home and business owners.



ENERGY SAVING PROGRAM

ESP knows how to save you money even when you forget. If you leave the room without turning the unit off, ESP knows that you left and 20 minutes later, set temperature is increased by 4°F when cooling and reduced by 8°F when heating. When you come back to the room, it returns to previous operating mode. This prevents wasteful operation to save energy without you having to think about it.



POWER DIFFUSER

A power diffuser operates automatically in either heating or cooling mode to optimally control the airflow. A comfortable space is quickly achieved.



COOLING

During cooling mode, far reaching horizontal airflow quickly creates a comfortable space throughout the entire room.





















INVERTER



Please complete product registration at www.fujitsugeneral.com to validate your new warranty

OLDACH
REFRIGERATION, AIR CONDITIONING & VENTILATION SUPPLIER

Standard Features

-  Wireless Remote Control
-  Economy Mode
-  Apple Catechin Filter
-  Daisy Chain
-  Ion Deodorizing Filter
-  Quiet Mode (Indoor)
-  Sleep Timer
-  Low Noise Mode
-  24 Hour Timer
-  Auto Restart/Reset
-  Weekly Timer
-  Auto Changeover
-  Dry Mode
-  Low Ambient Cooling
-  Auto Louver: 4-Way
-  Cold Prevention
-  Auto Mode
-  Remote Temp. Sensor*
-  Powerful Operation Mode
-  3rd Party Device Control*


* Available only with optional wired remote controller and optional interface kit.
 + Available only with optional interface kit. Operation monitoring and On/Off control only.

Optional Accessories


- Wired Remote Controller (Touch Panel): UTY-RNRUZ4
- Simple Remote Control (Hospitality): UTY-RHRY
- Simple Remote Control: UTY-RSRY
- Interface Kit: UTY-TWRXZ2
- Dry Contact Wire Kit: UTY-XWZXZ5
- 3rd Party Thermostat Converter: UTY-TTRZ

Dimensions (inches)

ASUG9LZAS3, ASUG12LZAS, ASUG15LZAS

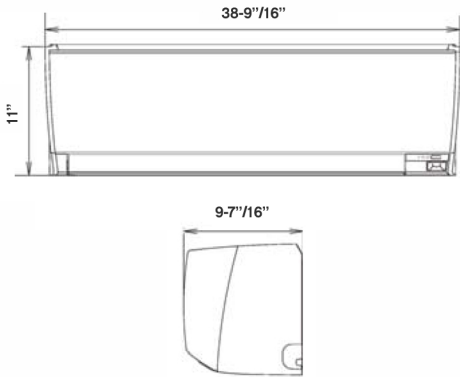

AOUG9LZAS1, AOUG12LZAS1, AOUG15LZAS1

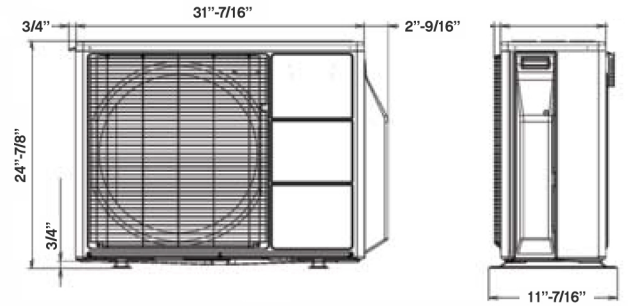

Note: Figures are based on 230 Volts.

UP TO 33.1 SEER	9LZAS1	12LZAS1	15LZAS1
Performance			
Normal Cooling	Btuh 9,000	12,000	14,500
Min. - Max. Cooling	Btuh 3,100 ~ 12,000	3,100 ~ 13,600	3,100 ~ 18,400
SEER	33.1	29.4	25.3
EER	18	15.2	13.9
Moisture Removal	Pt./h (l/h) 2.5 (1.2)	2.7 (1.3)	4.0 (1.9)
Fan - Air Circulation			
Hi	CFM 542	542	583
Medium	CFM 406	406	459
Low	CFM 312	312	312
Quiet	CFM 206	206	241
Fan Speed Stage	4+ Auto	4+ Auto	4+ Auto
Indoor Sound Level			
Hi	dB(A) 43/43	43/43	45/45
Medium	dB(A) 37/36	37/36	40/39
Low	dB(A) 31/31	31/31	32/32
Quiet	dB(A) 23/23	23/23	26/26
Outdoor Level Clg/Htg	dB(A) 46/47	46/47	49/50
Electrical			
Voltage/Frequency/Phase	208-230/60/1	208-230/60/1	208-230/60/1
Circuit Breaker	Amps 15	15	20
Current Rated/Max: Cooling	Amps 2.5/9.4	3.8/9.4	4.8/9.9
Power Use Rated/Max: Cooling	kW 0.50/0.85	0.79/0.99	1.04/1.56
Size & Weight			
Net Weight Indoor	lbs. 28	28	28
Net Weight Outdoor	lbs. 84	84	86
Indoor Unit (HxWxD)	inch 11-1/16x38-9/16x9-7/16	11-1/16x38-9/16x9-7/16	11-1/16x38-9/16x9-7/16
Outdoor Unit (HxWxD)	inch 24-7/8x31-7/16x11-7/16	24-7/8x31-7/16x11-7/16	24-7/8x31-7/16x11-7/16
Refrigeration	R410A	R410A	R410A
Additional Data			
Air Direction: Horizontal	Automatic	Automatic	Automatic
Vertical	Automatic	Automatic	Automatic
Air Filter	Washable	Washable	Washable

The Fujitsu logo is a registered trademark of Fujitsu Limited. The Halcyon logo and name is a trademark of Fujitsu General America, Inc. ENERGY STAR is a registered trademark of the EPA and DOE. Copyright 2015 Fujitsu General America, Inc.

Proper sizing and installation of equipment is critical to achieve optimal performance. Split system air conditioners and heat pumps must be matched with appropriate coil components to meet ENERGY STAR criteria. Ask your contractor for details or visit www.energystar.gov.

Fujitsu's products are subject to continuous improvements. Fujitsu reserves the right to modify product design, specifications and information without notice and without incurring any obligations.



Fujitsu Limited Warranties for Residential Products

Extended 12-12 Warranty Available through qualified contractors

