

VRF Indoor Unit

MIH112T1HN18 – High Static Pressure Duct

1-phase, 220-240V, 50/60Hz



Submittal Data

Job name: _____

Location: _____

Tag: _____

Date: _____



MIH112T1HN18 Features:

- ♦ High efficiency DC fan motor
- ♦ 20-step static pressure control (requires latest generation wired controllers)
- ♦ External static pressure can be up to 250Pa
- ♦ 7-speed fan control
- ♦ Built-in EXV
- ♦ A double-skin drainage pan provides double protection for ceilings

Specifications:


| Model | | | MIH112T1HN18 |
|-------------------------------------|-----------------|-------------------|------------------------------------|
| Cooling ¹ | Capacity | kW | 11.2 |
| | | kBtu/h | 38.2 |
| | Power input | W | 248 |
| Heating ² | Capacity | kW | 12.5 |
| | | kBtu/h | 42.7 |
| | Power input | W | 248 |
| Air flow rate ³ | | m ³ /h | 2140/2015/1890/1766/1641/1516/1391 |
| External static pressure | | Pa | 80 (0-250) |
| Sound pressure level ⁴ | | dB(A) | 41/40/38/37/35/34/32 |
| Net dimensions ⁵ (W×H×D) | | mm | 1400×299×750 |
| Packed dimensions (W×H×D) | | mm | 1565×359×890 |
| Net/Gross weight | | kg | 44.5/48.5 |
| Pipe connections | Liquid/Gas pipe | mm | Φ9.52/Φ15.9 |
| | Drain pipe | mm | ODΦ25 |
| Minimum Circuit Amps (MCA) | | A | 3.34 |
| Recommended Fuse Size (MFA) | | A | 15 |

Notes:

1. Indoor temperature 27°CDB, 19°CWB; outdoor temperature 35°CDB; equivalent refrigerant piping length 7.5m with zero level difference.
2. Indoor temperature 20°CDB; outdoor temperature 7°CDB, 6°CWB; equivalent refrigerant piping length 7.5m with zero level difference.
3. Air flow rate are from the highest speed to the lowest speed, total 7 rates for each model.
4. Sound pressure level is from highest level to lowest level, total 7 levels for each model. Sound pressure level is measured 1.4m below the unit in a semi-anechoic chamber.
5. Unit body dimensions given are the largest external dimensions of the unit, including hanger attachments.

Dimensional Drawing:

Unit (mm)

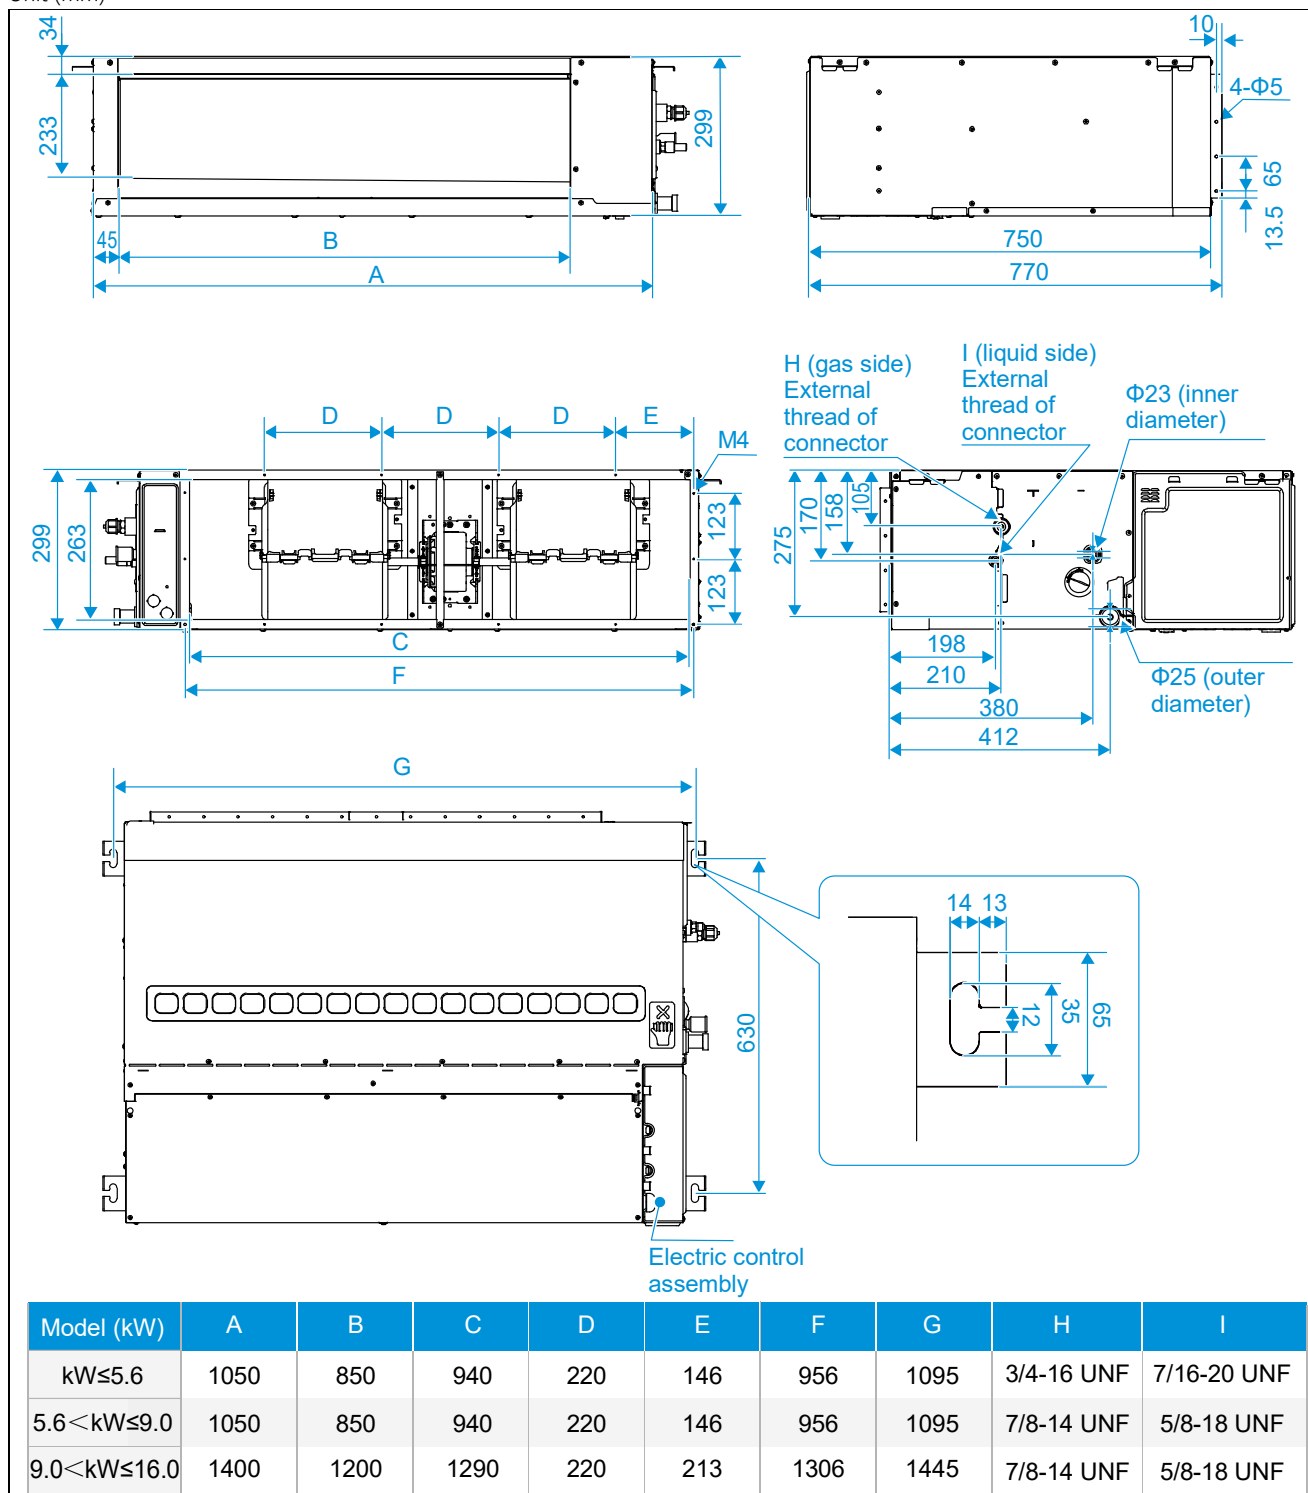

Product specifications change from time to time as product improvements and developments are released and may vary from those in this document.