

VRF Indoor Unit

MIH36T2HN18 – Medium Static Pressure Duct

1-phase, 220-240V, 50/60Hz



Submittal Data

Job name: _____

Location: _____

Tag: _____

Date: _____



MIH36T2HN18 Features:

- ♦ High efficiency DC fan motor
- ♦ 6-step static pressure control (requires latest generation wired controllers)
- ♦ 7-speed fan control
- ♦ Fresh air intake
- ♦ High-lift drain pump with 1200mm pump head
- ♦ Built-in EXV
- ♦ Flexible installation for the air inlet may be positioned either on the underside or the rear of the unit

Specifications:

Model			MIH36T2HN18
Cooling ¹	Capacity	kW	3.6
		kBtu/h	12.3
	Power input	W	50
Heating ²	Capacity	kW	4
		kBtu/h	13.7
	Power input	W	50
Air flow rate ³		m ³ /h	575/535/495/455/415/375/335
External static pressure		Pa	30 (10-160)
Sound pressure level ⁴		dB(A)	29/28/27/26/25/23/22
Net dimensions ⁵ (W×H×D)		mm	600×245×750
Packed dimensions (W×H×D)		mm	765×305×885
Net/Gross weight		kg	18.5/21
Pipe connections	Liquid/Gas pipe	mm	Φ6.35/Φ12.7
	Drain pipe	mm	ODΦ25
Minimum Circuit Amps (MCA)		A	0.80
Recommended Fuse Size (MFA)		A	15



Notes:

1. Indoor temperature 27°CDB, 19°CWB; outdoor temperature 35°CDB; equivalent refrigerant piping length 7.5m with zero level difference.
2. Indoor temperature 20°CDB; outdoor temperature 7°CDB, 6°CWB; equivalent refrigerant piping length 7.5m with zero level difference.
3. Air flow rate are from the highest speed to the lowest speed, total 7 rates for each model.
4. Sound pressure level is from highest level to lowest level, total 7 levels for each model. Sound pressure level is measured 1.4m below the unit in a semi-anechoic chamber.
5. Unit body dimensions given are the largest external dimensions of the unit, including hanger attachments.


Dimensional Drawing:

Unit (mm)


External dimension, air outlet size, and size of fresh air outlet:

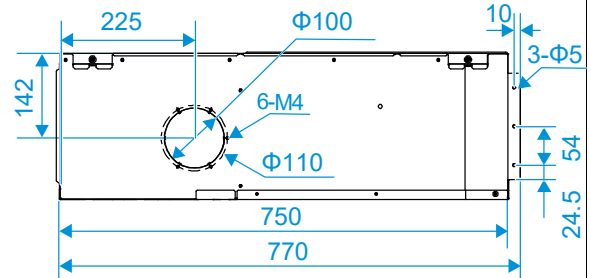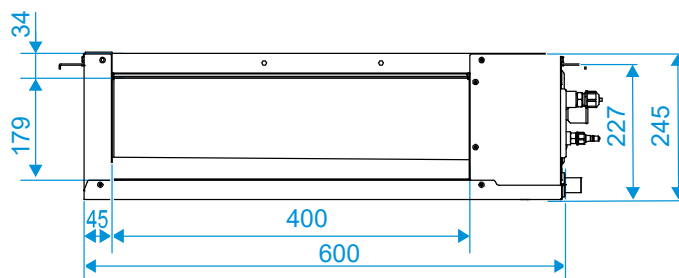

Size of return air inlet (back return air mode):

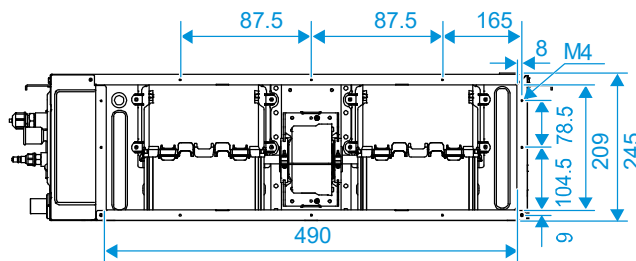

Dimension of pipe and water pipe:

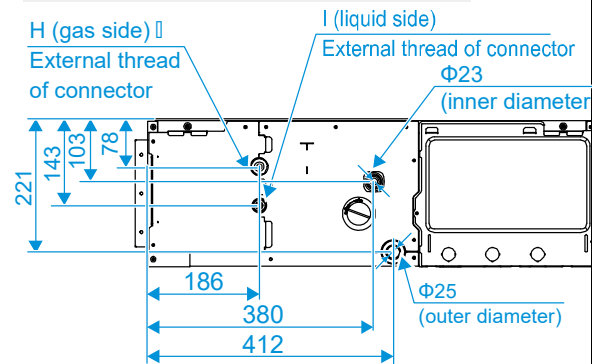

Size of return air inlet (bottom return air mode), and the distance between the lugs:

