

VRF Indoor Unit

MIH71Q1HN18 - One-way Cassette

1-phase, 220-240V, 50/60Hz



Submittal Data

Job name: _____

Location: _____

Tag: _____

Date: _____



MIH71Q1HN18 Features:

- ◆ High efficiency DC fan motor
- ◆ 153 mm thickness
- ◆ 5-step swing louver
- ◆ 7-speed fan control
- ◆ Quiet operation
- ◆ Built-in EXV
- ◆ High-lift drain pump with 1200mm pump head

Specifications:


Model			MIH71Q1HN18
Cooling ¹	Capacity	kW	7.1
		kBtu/h	24.2
	Power input	W	60
Heating ²	Capacity	kW	8.0
		kBtu/h	27.3
	Power input	W	60
Air flow rate ³		m ³ /h	933/873/815/749/689/637/592
Sound pressure level ⁴		dB(A)	43/41/40/39/37/36/35
Main body	Net dimensions ⁵ (W×H×D)	mm	1275×189×452
	Packed dimensions (W×H×D)	mm	1370×295×505
	Net/Gross weight	kg	16.9/21.4
Panel	Net dimensions (W×H×D)	mm	1350×25×505
	Packed dimensions (W×H×D)	mm	1410×95×560
	Net/Gross weight	kg	4/5.6
Pipe connections	Liquid/Gas pipe	mm	Φ9.52/Φ15.9
	Drain pipe	mm	OD Φ25
Minimum Circuit Amps (MCA)		A	0.59
Recommended Fuse Size (MFA)		A	15

Notes:

1. Indoor temperature 27°CDB, 19°CWB; outdoor temperature 35°CDB; equivalent refrigerant piping length 7.5m with zero level difference.
2. Indoor temperature 20°CDB; outdoor temperature 7°CDB, 6°CWB; equivalent refrigerant piping length 7.5m with zero level difference.
3. Air flow rate are from the highest speed to the lowest speed, total 7 rates for each model.
4. Sound pressure level is from highest level to lowest level, total 7 levels for each model. Sound pressure level is measured 1.4m below the unit in a semi-anechoic chamber.
5. Unit body dimensions given are the largest external dimensions of the unit, including hanger attachments.

Dimensional Drawing:

Unit (mm)

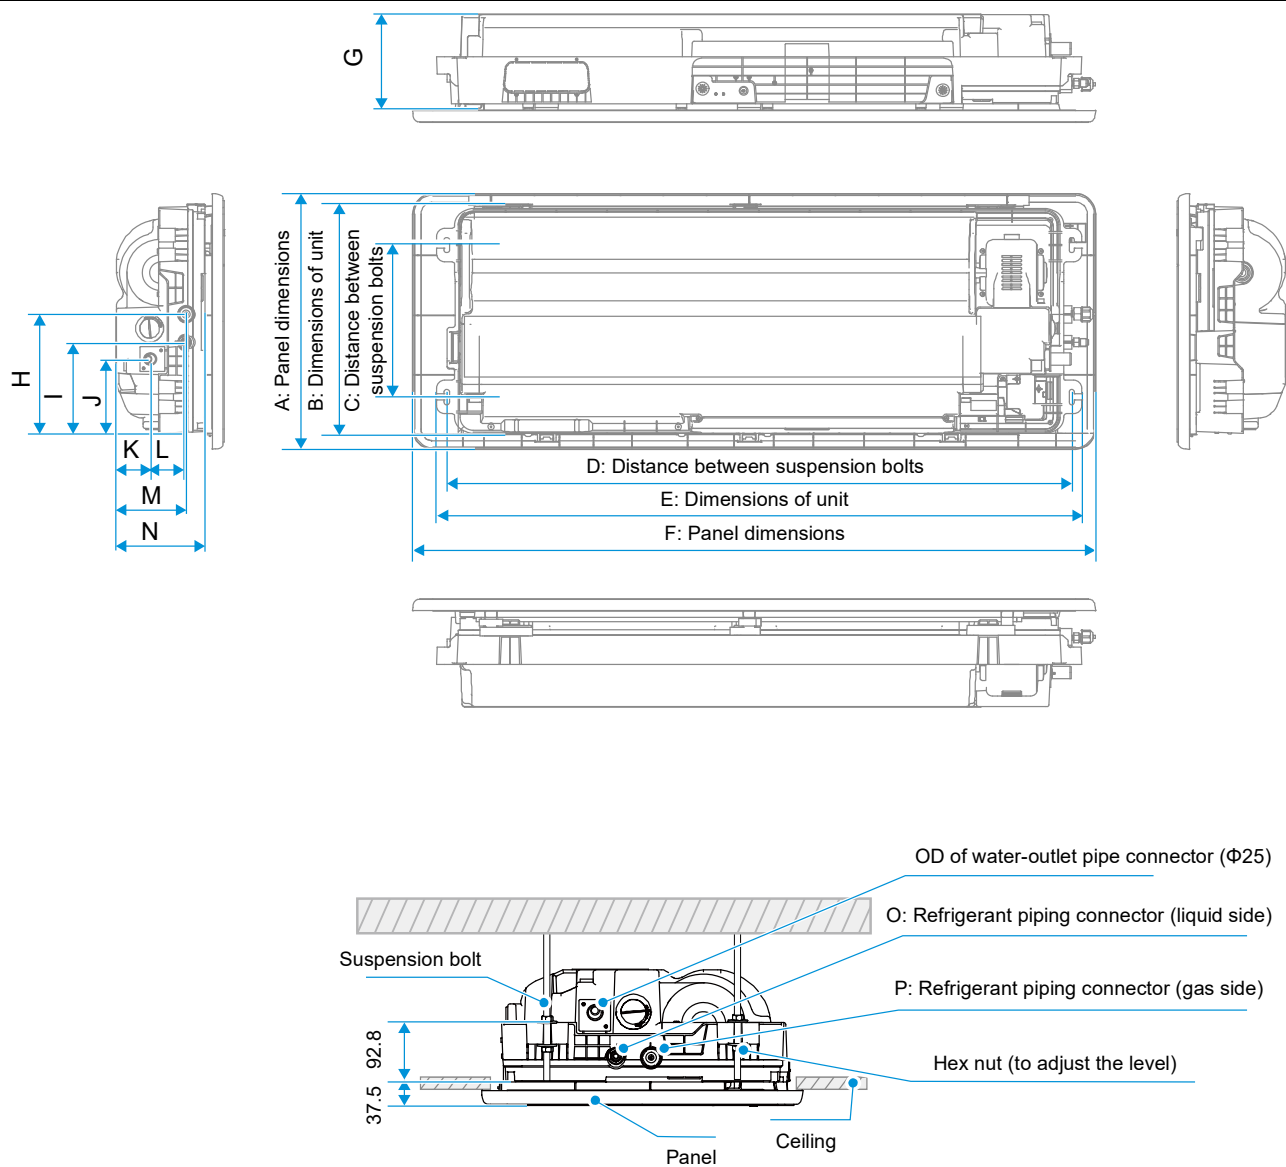

Capacity(kW)	A	B	C	D	E	F	G	H	I	J	K
kW≤3.6	465	428	290	1004	1054	1180	153	238	188	139	34
3.6<kW≤5.6	505	452	300	1225	1275	1350	189	236	180	147	68
5.6<kW≤7.1	505	452	300	1225	1275	1350	189	236	180	147	68

Capacity(kW)	L	N	O	P							
kW≤3.6	70	102	141	Φ6.35	Φ12.7						
3.6<kW≤5.6	70	139	176	Φ6.35	Φ12.7						
5.6<kW≤7.1	70	139	176	Φ9.52	Φ15.9						

Product specifications change from time to time as product improvements and developments are released and may vary from those in this document.